

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: ML-22793	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME: Natural Buttes Unit	
2. NAME OF OPERATOR: EOG RESOURCES, INC.				9. WELL NAME and NUMBER: Natural Buttes Unit 620-30E	
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 789-0790	10. FIELD AND POOL, OR WILDCAT: Natural Buttes/Wasatch/Mesaverde	
4. LOCATION OF WELL (FOOTAGES) 619559X 4419654Y AT SURFACE: 1980' FNL & 680' FWL 39.920417 LAT 109.601731 LON AT PROPOSED PRODUCING ZONE: SAME 39.920485 -109.601029				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Lot 2 30 10S 21E S SWNW	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 45.3 miles south of Vernal, UT				12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 680		16. NUMBER OF ACRES IN LEASE: 644		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: Suspended	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1460		19. PROPOSED DEPTH: 7,219		20. BOND DESCRIPTION: NM 2308	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5281' NAT GL		22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION: 45 DAYS	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
17-1/2	13-3/8	H-40	48#	45	SEE ATTACHED EIGHT POINT PLAN
12-1/4	9-5/8	J-55	36#	2,300	SEE ATTACHED EIGHT POINT PLAN
7-7/8	4-1/2	N-80	11.6#	7,219	SEE ATTACHED EIGHT POINT PLAN

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) Mary A. Maestas TITLE Regulatory Assistant
SIGNATURE Mary A. Maestas DATE 5/17/2007

(This space for State use only)

API NUMBER ASSIGNED: 43-047-39309

**Approved by the
Utah Division of
Oil, Gas and Mining**

APPROVAL:

Date: 05-30-07
By: [Signature]
(See Instructions on Reverse Side)

RECEIVED

MAY 18 2007

DIV. OF OIL, GAS & MINING


T10S, R21E, S.L.B.&M.

EOG RESOURCES, INC.

Well location, NBU #620-30E, located as shown in Lot 2 of Section 30, T10S, R21E, S.L.B.&M., Uintah County, Utah.


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

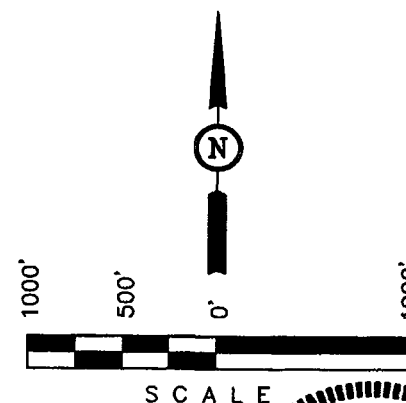

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

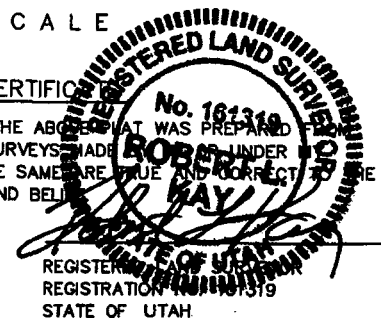

1/2" Rebar 0.6" High,
Pile of Stones, Set
Stone

BASIS OF BEARINGS


BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)
LATITUDE = 39°55'13.50" (39.920417)
LONGITUDE = 109°36'06.23" (109.601731)
(NAD 27)
LATITUDE = 39°55'13.63" (39.920453)
LONGITUDE = 109°36'03.75" (109.601042)

LEGEND:

- └─ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

R R
20 21
E E
Brass Cap Flush W/
Pile of Stones

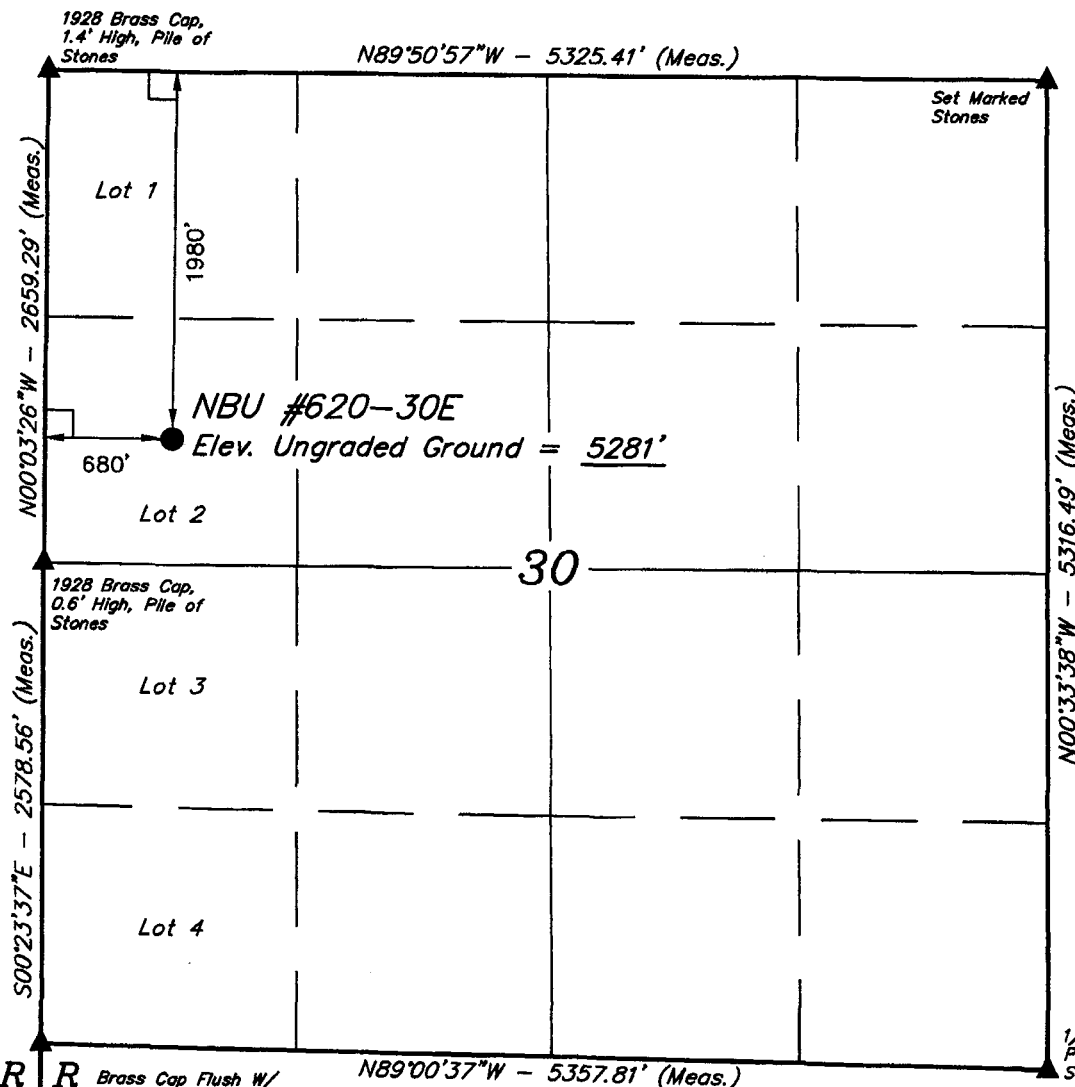

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-01-07	DATE DRAWN: 05-07-07
PARTY D.S. C.B. L.K.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

EIGHT POINT PLAN

NATURAL BUTTES UNIT 620-30E SW/NW, SEC. 30, T10S, R21E, S.L.B.&M.. UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	1,086		Shale	
Wasatch	4,341	Primary	Sandstone	Gas
Chapita Wells	4,978	Primary	Sandstone	Gas
Buck Canyon	5,674	Primary	Sandstone	Gas
North Horn	6,277	Primary	Sandstone	Gas
TD	7,219			

Estimated TD: 7,219' or 200'± below Price River top Anticipated BHP: 3,940 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

CASING	Hole Size	Length	Size	WEIGHT	Grade	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	17 1/2"	0 – 45'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 1/4"	0' – 2,300' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	Surface – TD	4-1/2"	11.6#	N-80	LTC	6350 PSI	7780 Psi	233,000#

Note: 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 620-30E **SW/NW, SEC. 30, T10S, R21E, S.L.B.&M..** **UINTAH COUNTY, UTAH**

5. Float Equipment:

Surface Hole Procedure (0' - 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

EIGHT POINT PLAN

NATURAL BUTTES UNIT 620-30E SW/NW, SEC. 30, T10S, R21E, S.L.B.&M.. UINTAH COUNTY, UTAH

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: 185 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: 207 sks Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 117 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 590 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

Final Cement volumes will be based upon gauge-hole plus 45% excess.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 620-30E
SW/NW, SEC. 30, T10S, R21E, S.L.B.&M..
UINTAH COUNTY, UTAH

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring


12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)


**EOG RESOURCES 11" 5,000 PSI W.P. BOP
CONFIGURATION**

PAGE 1 OF 2

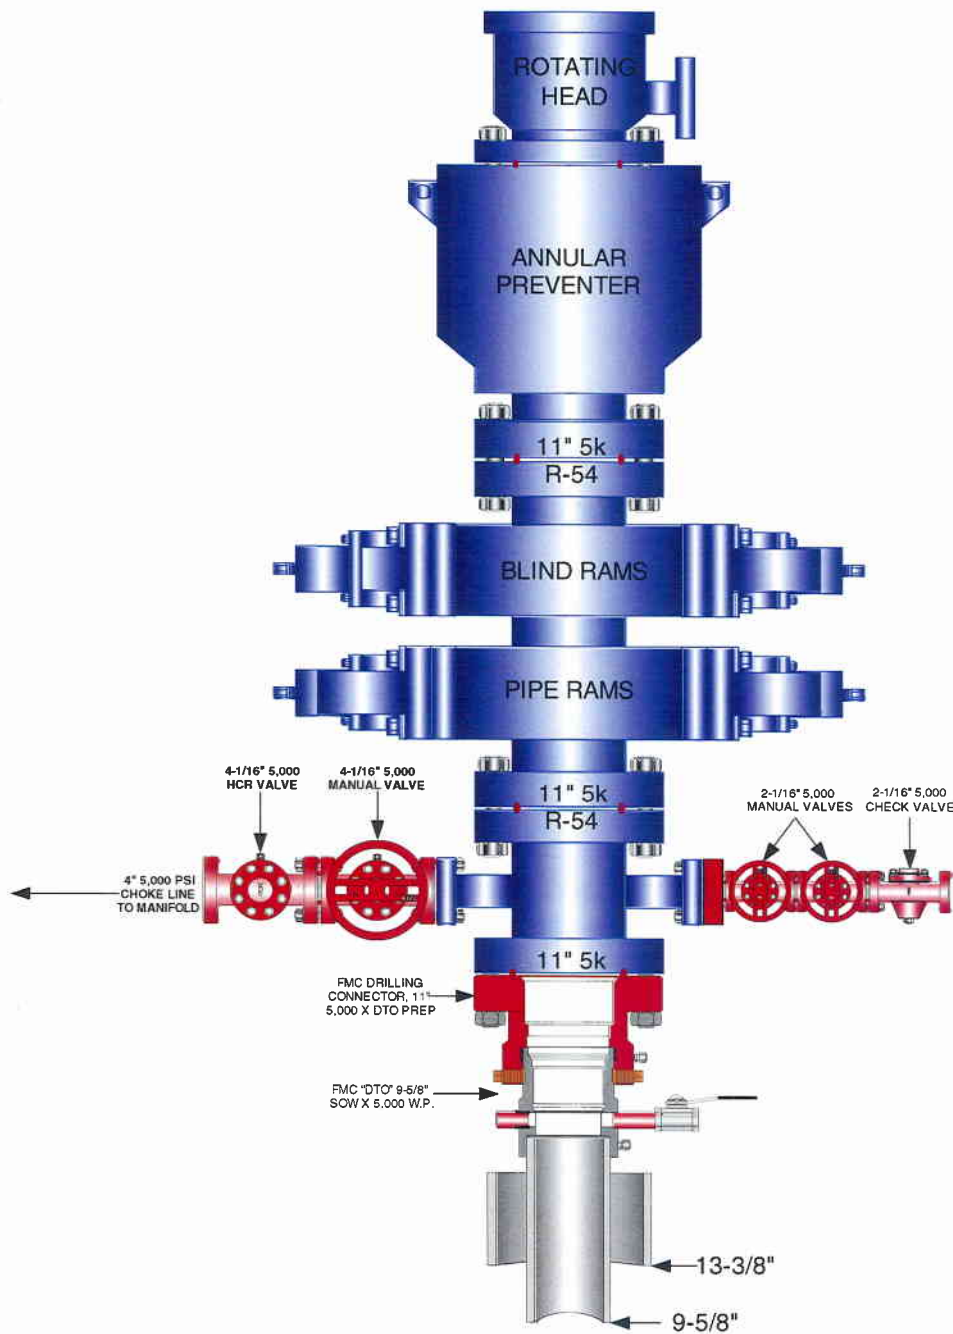

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION W/ 5,000 PSI WP VALVES

PAGE 2 OF 2

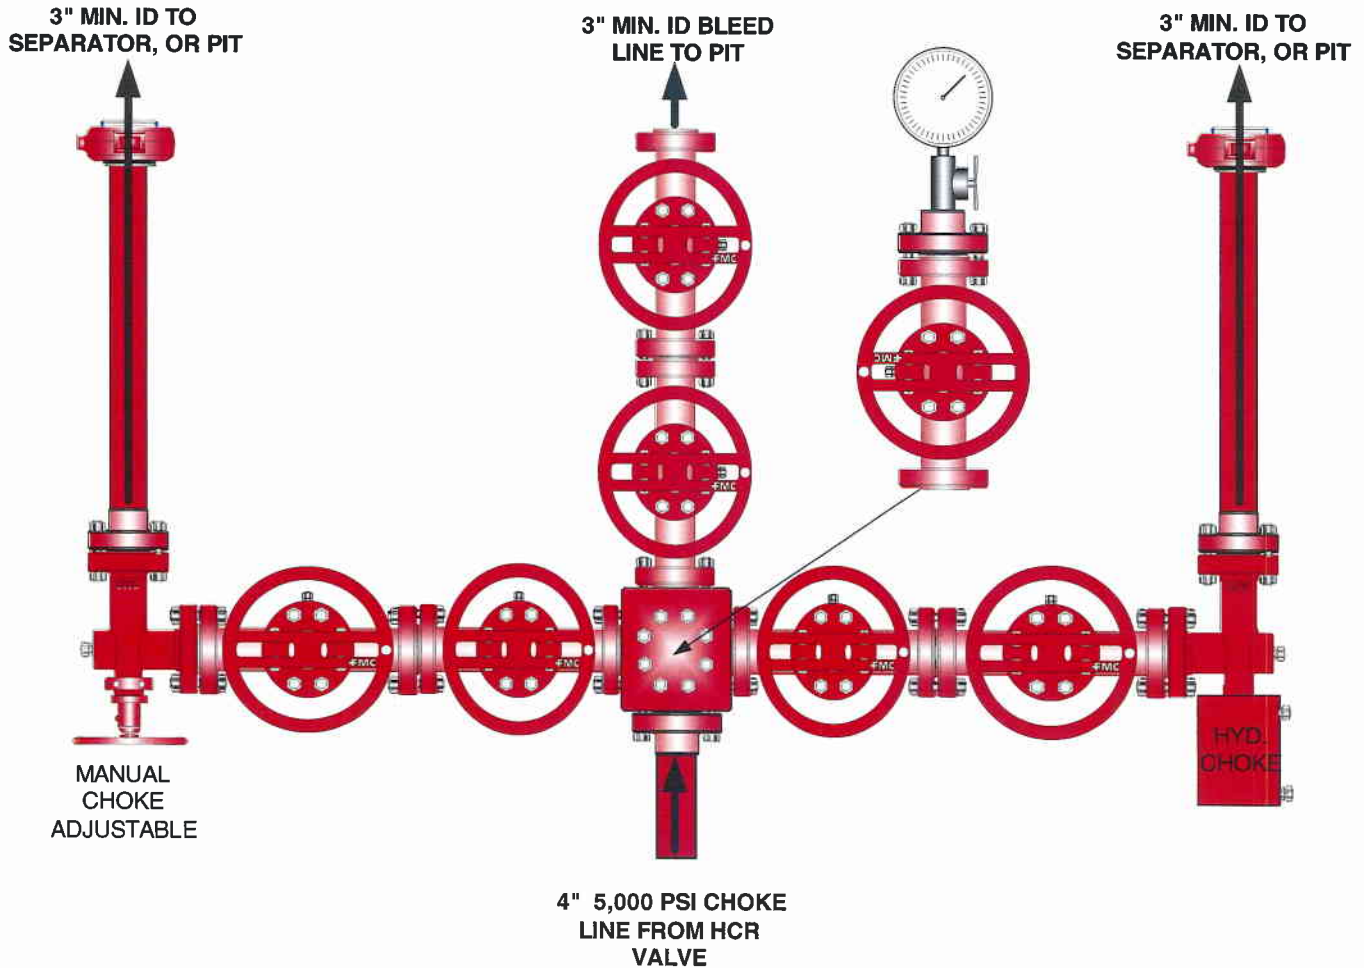

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, whichever is greater.
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.



***Natural Buttes Unit 620-30E
Lot 2, Section 30, T10S, R21E
Uintah County, Utah***

SURFACE USE PLAN

1. EXISTING ROADS:

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 45.3 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 2112' in length. See attached Topo B.
- B. The access road has a 40-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.
- I. A 40-foot permanent right-of-way is requested. No surfacing material will be used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed, safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 40-foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 40-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and attaching piping.
2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

1. Proposed pipeline will transport natural gas.
2. The pipeline will be a permanent feeder line.
3. The length of the proposed pipeline is 2569' x 40'. The proposed pipeline leaves the southern edge of the well pad (Lease ML-22793) proceeding in a northwesterly direction for an approximate distance of 2569' tying into a proposed pipeline in the NWNW of Section 30, T10S, R21E. Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.

4. Proposed pipeline will be a 4" OD steel, zap-lok line laid on the surface
5. Proposed pipeline will be laid on surface.
6. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Bonanza Power Plant water source in Sec 26, T8S, R23E Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

1. Cuttings will be confined in the reserve pit.
2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at

one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 16-millimeter plastic liner. Sufficient bedding (i.e. weed free straw, or hay; felt; polyswell or soil) will be used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the northeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the east side of the location, a minimum of 100 feet from the wellhead and 30 feet from the reserve pit fence.

The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the north.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion

of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Interim Reclamation (Producing Location)

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours – See attached Figure #3. The reserve pit will be reclaimed within 90 days from the date of the well completion, or as soon as environmental conditions allow. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

State of Utah

12. OTHER INFORMATION:

- A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:
- Whether the materials appear eligible for the National Register of Historic Places;
 - The mitigation measures the operator will likely have to undertake before the site can be used.
 - A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to

Drill™ will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources and paleontology survey will be conducted and submitted by Montgomery Archaeological Consultants.

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Mary A. Maestas
EOG Resources, Inc.
P.O. Box 1815
Vernal, UT 84078
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Natural Buttes 620-30E Well, located in Lot 2, of Section 30, T10S, R21E, Uintah County, Utah; State land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

May 17, 2007
Date


Mary A. Maestas, Regulatory Assistant

EOG RESOURCES, INC.

LOCATION LAYOUT FOR

NBU #620-30E
SECTION 30, T10S, R21E, S.L.B.&M.
1980' FNL 680' FWL


FIGURE #1

SCALE: 1" = 50'
DATE: 05-07-07
Drawn By: L.K.

Approx.
Top of
Cut Slope

NOTE:

Flare Pit is to
be located a min.
of 100' from the
Well Head.

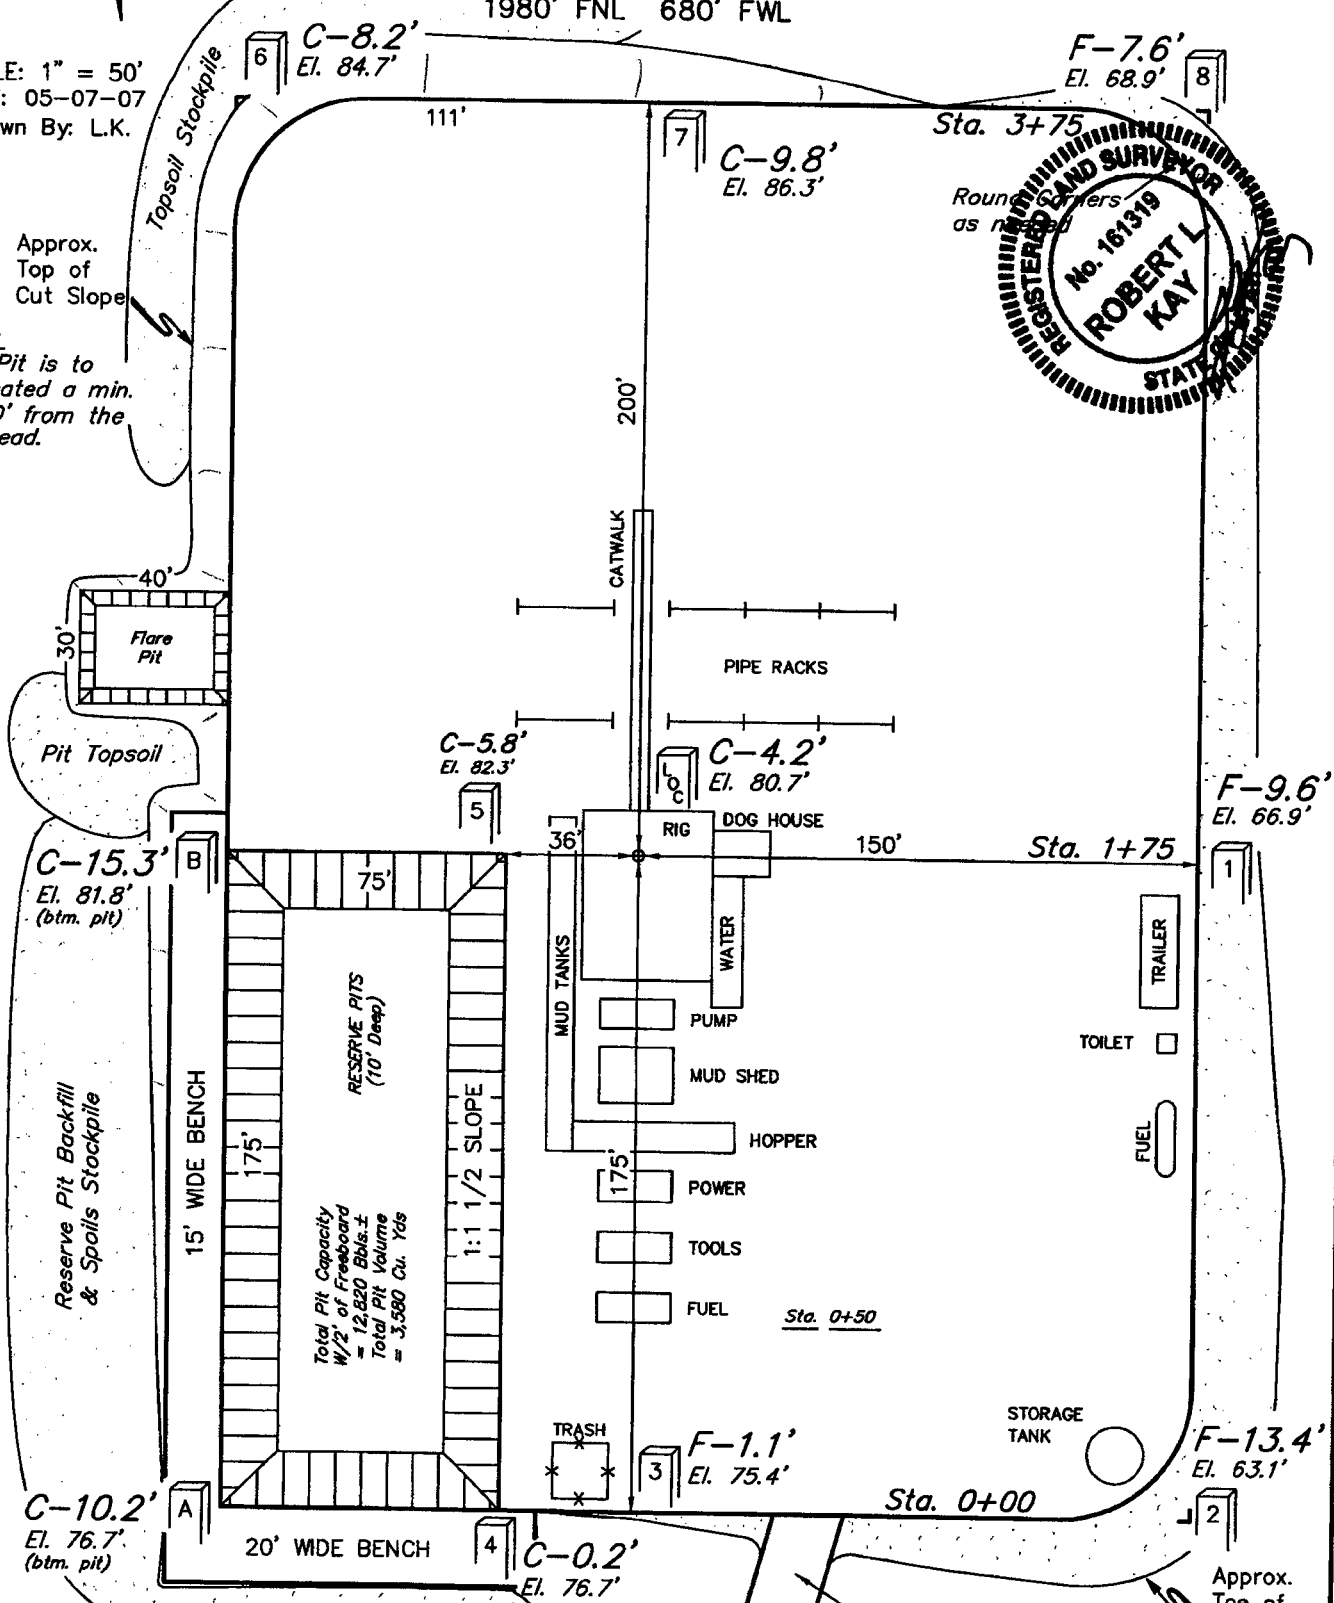

Elev. Ungraded Ground at Location Stake = 5280.7'

Elev. Graded Ground at Location Stake = 5276.5'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah, 84078 * (435) 788-1017

EOG RESOURCES, INC.


TYPICAL CROSS SECTIONS FOR

NBU #620-30E

SECTION 30, T10S, R21E, S.L.B.&M.

1980' FNL 680' FWL


FIGURE #2



1" = 20'
X-Section
Scale
1" = 50'

DATE: 05-07-07

Drawn By: L.K.

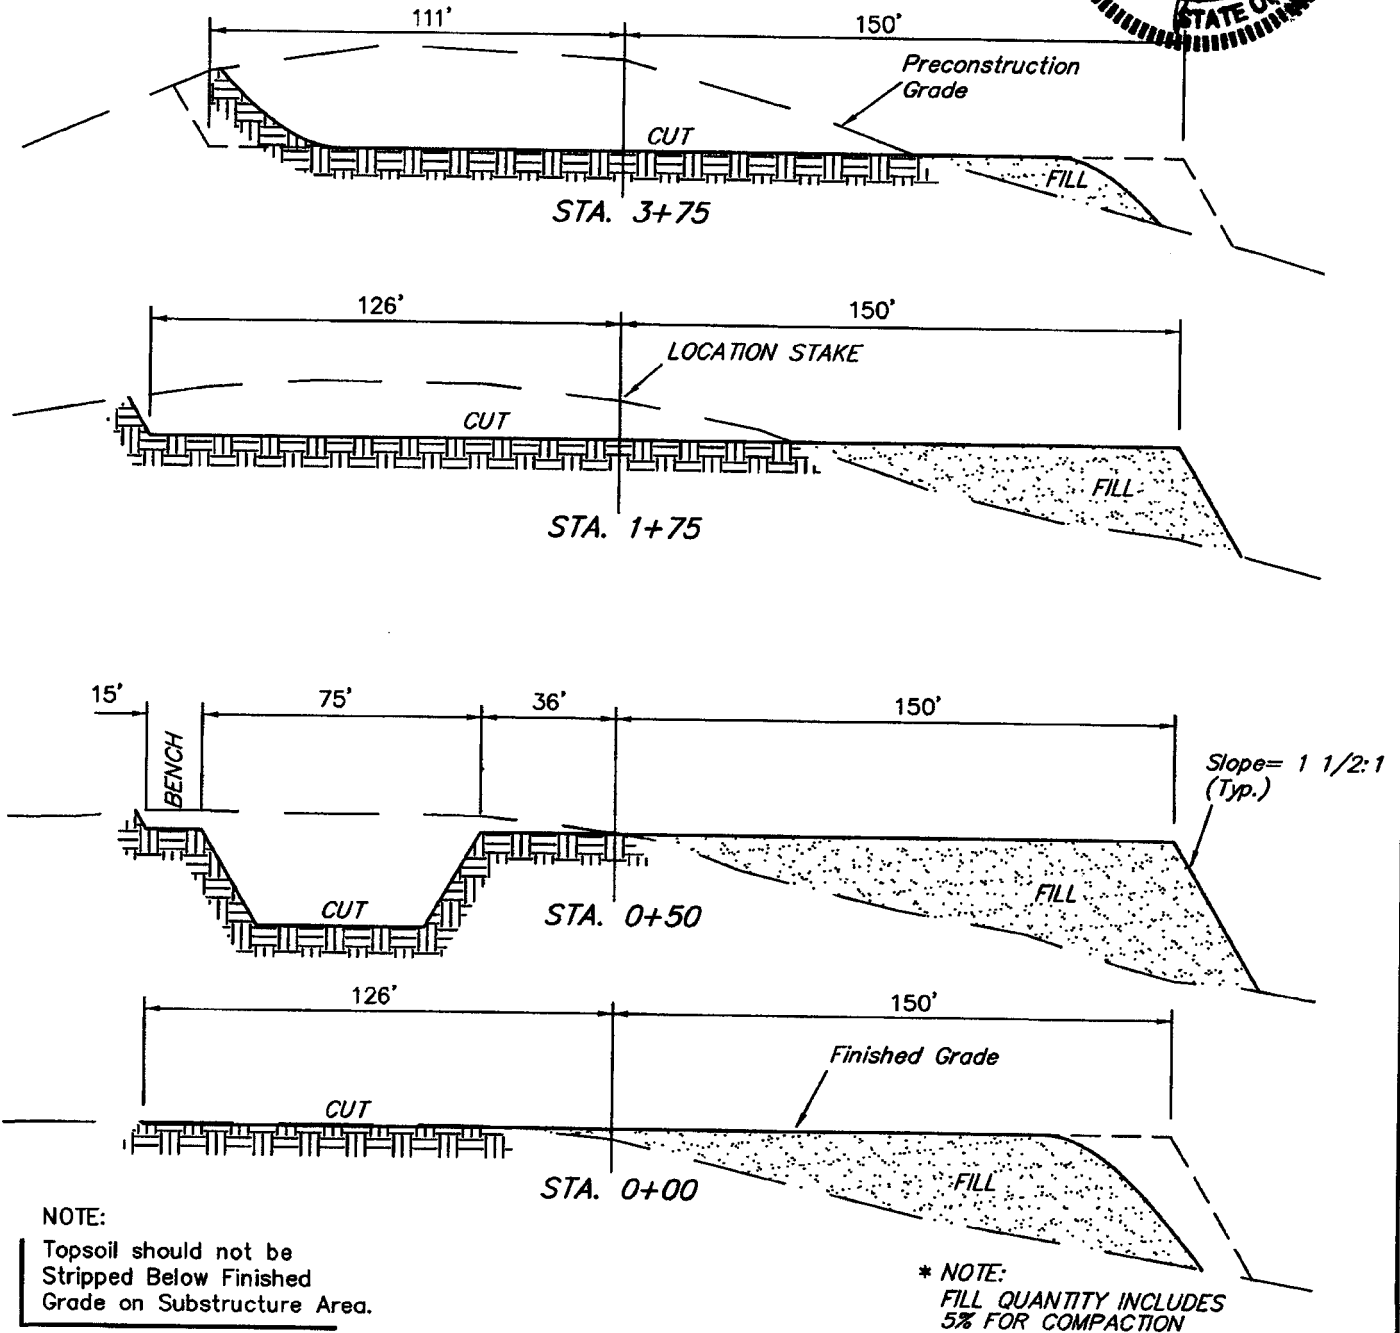

APPROXIMATE YARDAGES

(6") Topsoil Stripping	= 2,230 Cu. Yds.
Remaining Location	= 14,250 Cu. Yds.
TOTAL CUT	= 16,480 CU.YDS.
FILL	= 12,460 CU.YDS.

EXCESS MATERIAL	= 4,020 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,020 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.



UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

EOG RESOURCES, INC.
PRODUCTION FACILITY LAYOUT FOR
NBU #620-30E
SECTION 30, T10S, R21E, S.L.B.&M.
1980' FNL 680' FWL

FIGURE #3



SCALE: 1" = 50'
DATE: 05-07-07
Drawn By: L.K.

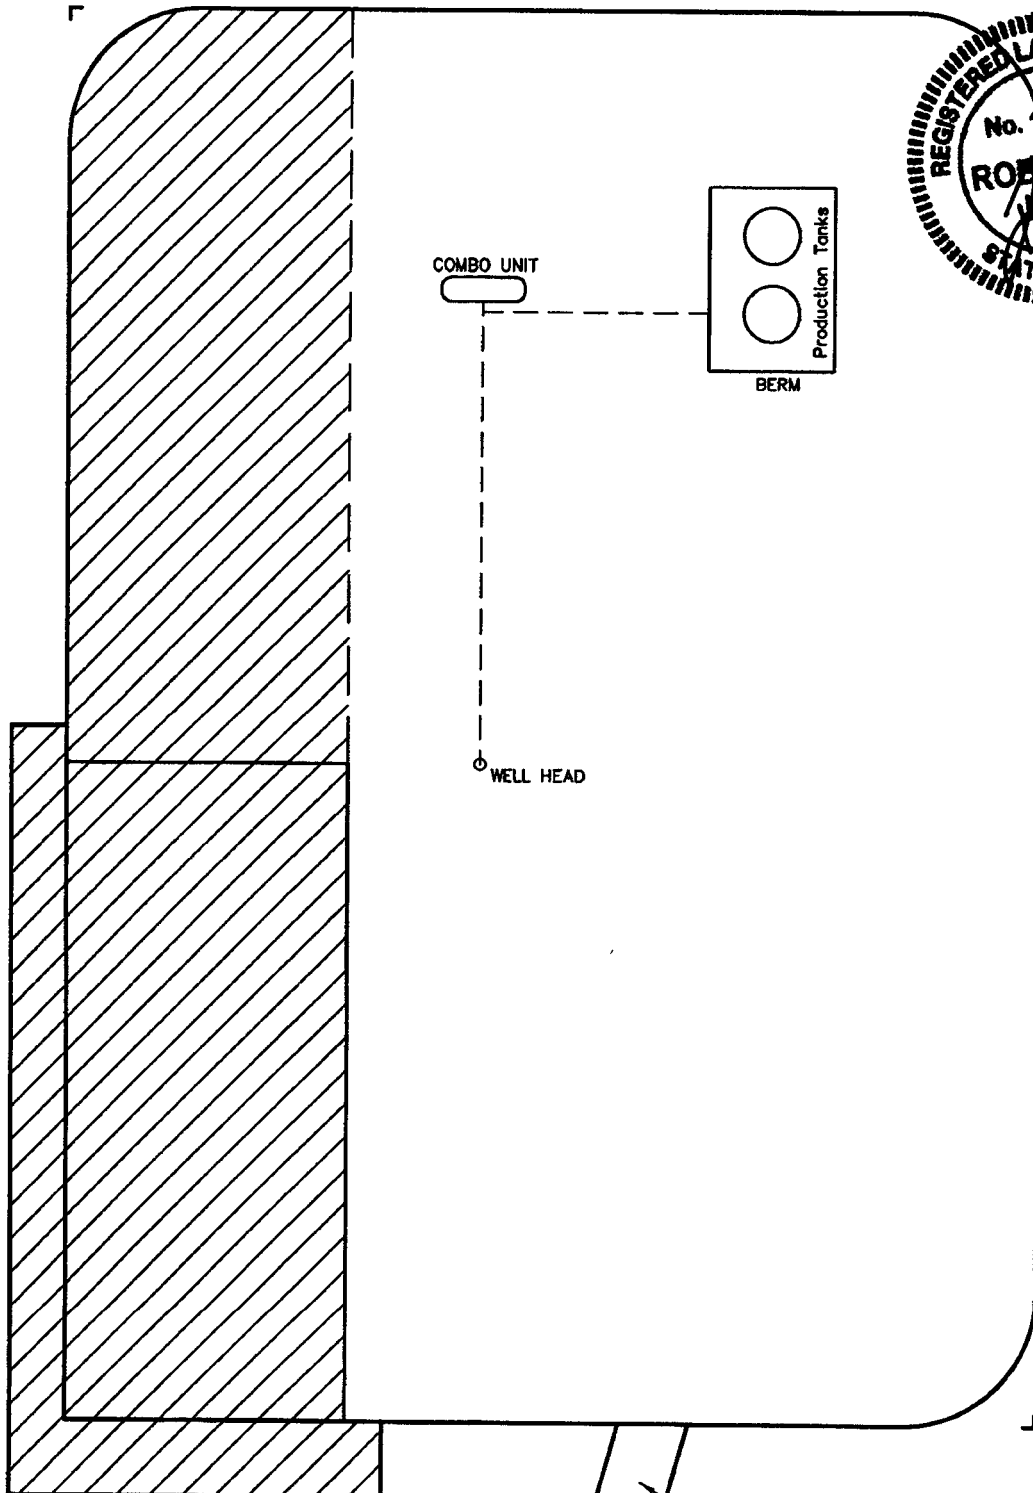

 RE-HABED AREA

Access Road
UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

EOG RESOURCES, INC.
EAST CHAPITA #78-23
LOCATED IN UINTAH COUNTY, UTAH
SECTION 23, T9S, R23E, S.L.B.&M.

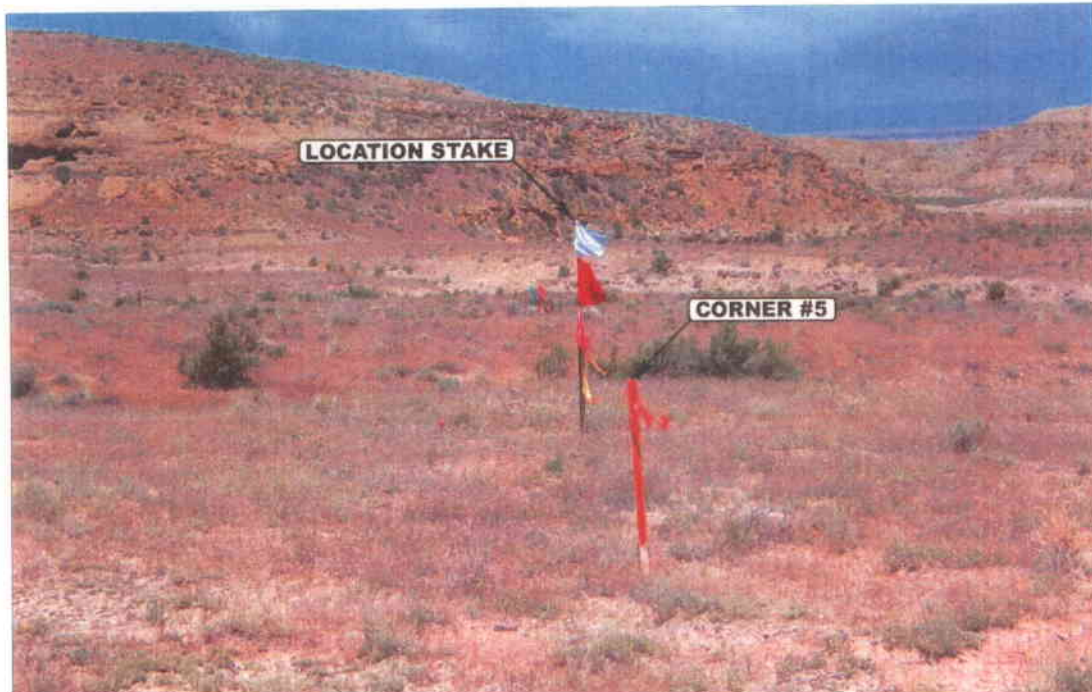


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



Since 1964

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


05 30 07
MONTH DAY YEAR

PHOTO

TAKEN BY: A.F.

DRAWN BY: B.C.

REVISED: 00-00-00

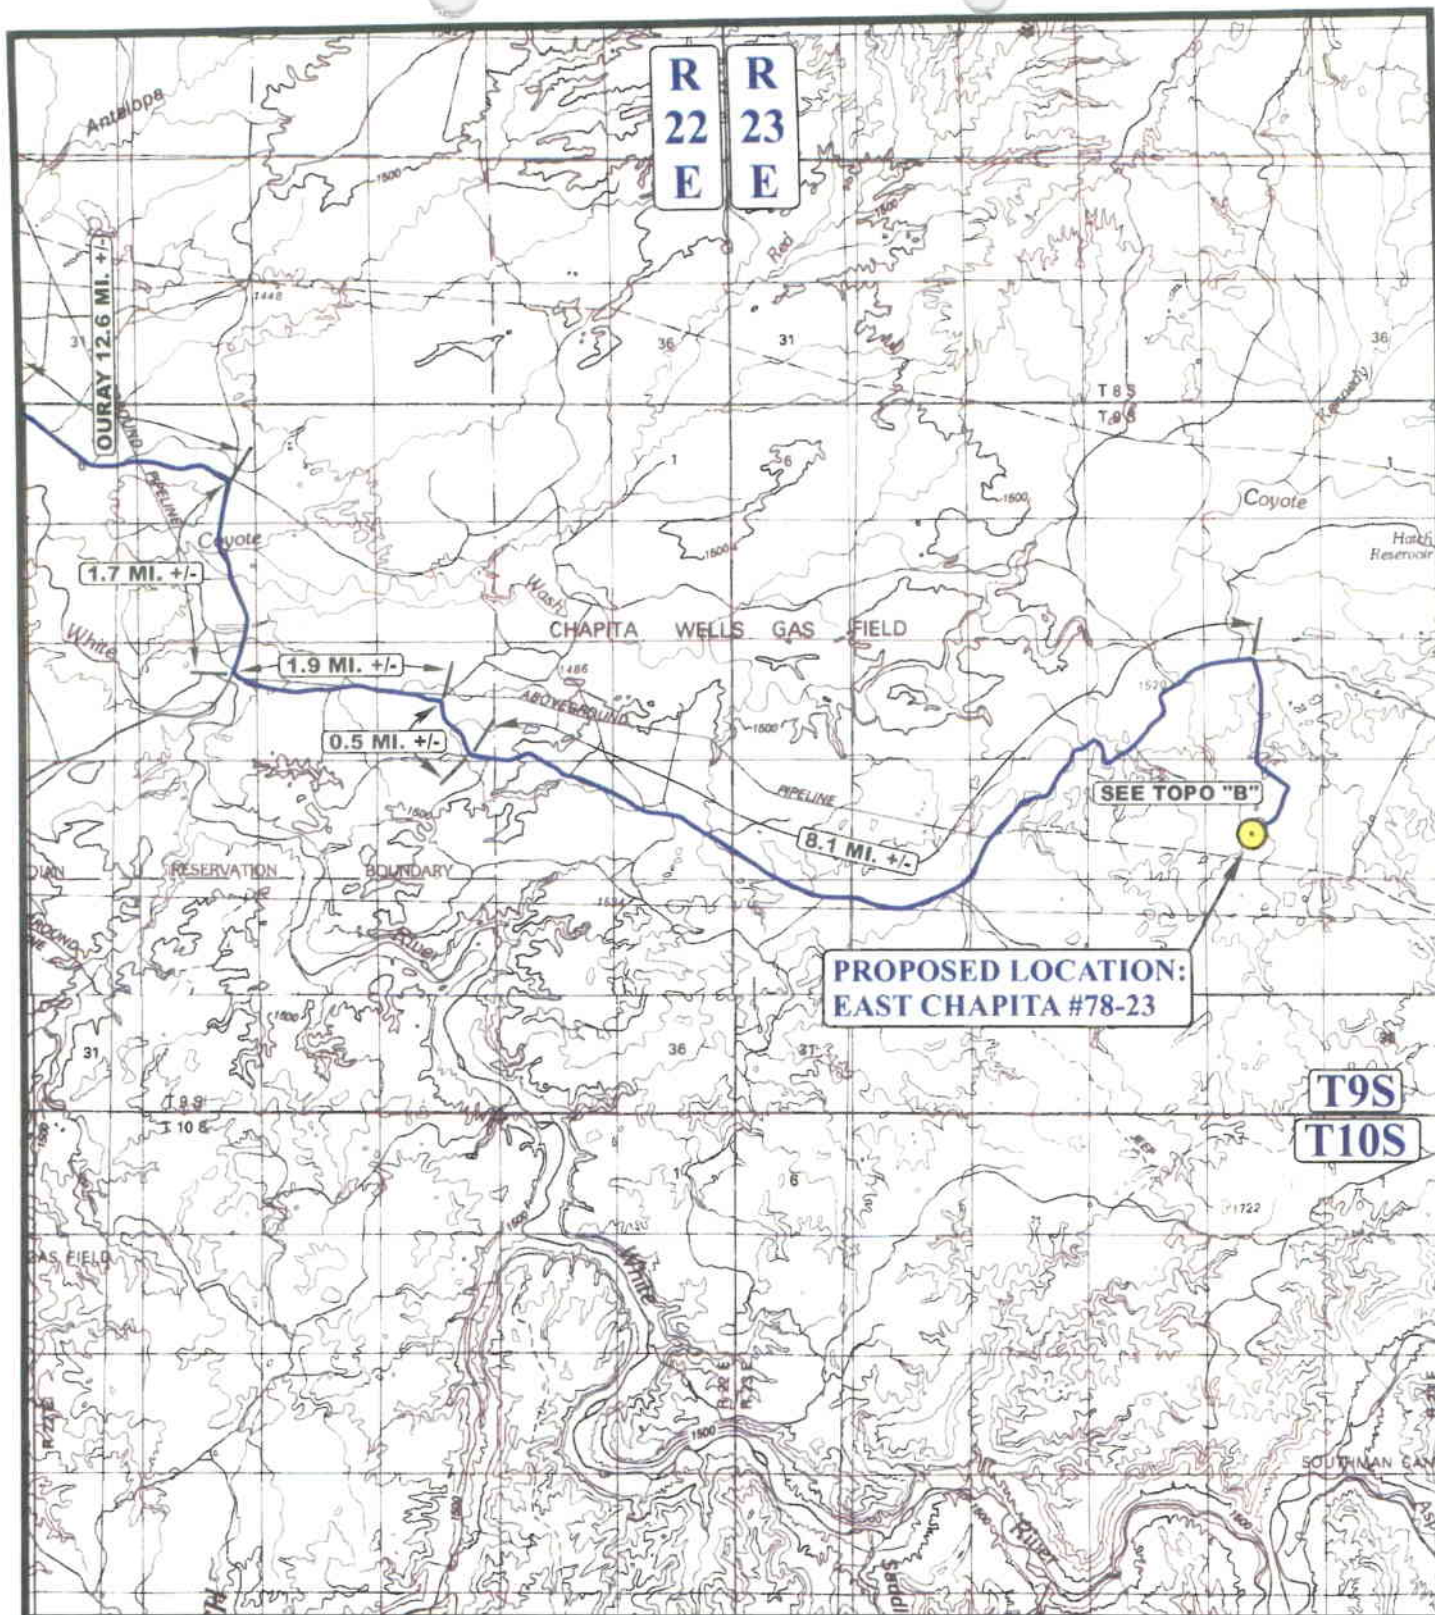

LEGEND:

● PROPOSED LOCATION

EOG RESOURCES INC.

EAST CHAPITA #78-23
SECTION 23, T9S, R23E, S.L.B.&M.
1970' FSL 2170' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

05 30 07
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: B.C. REVISED: 00-00-00



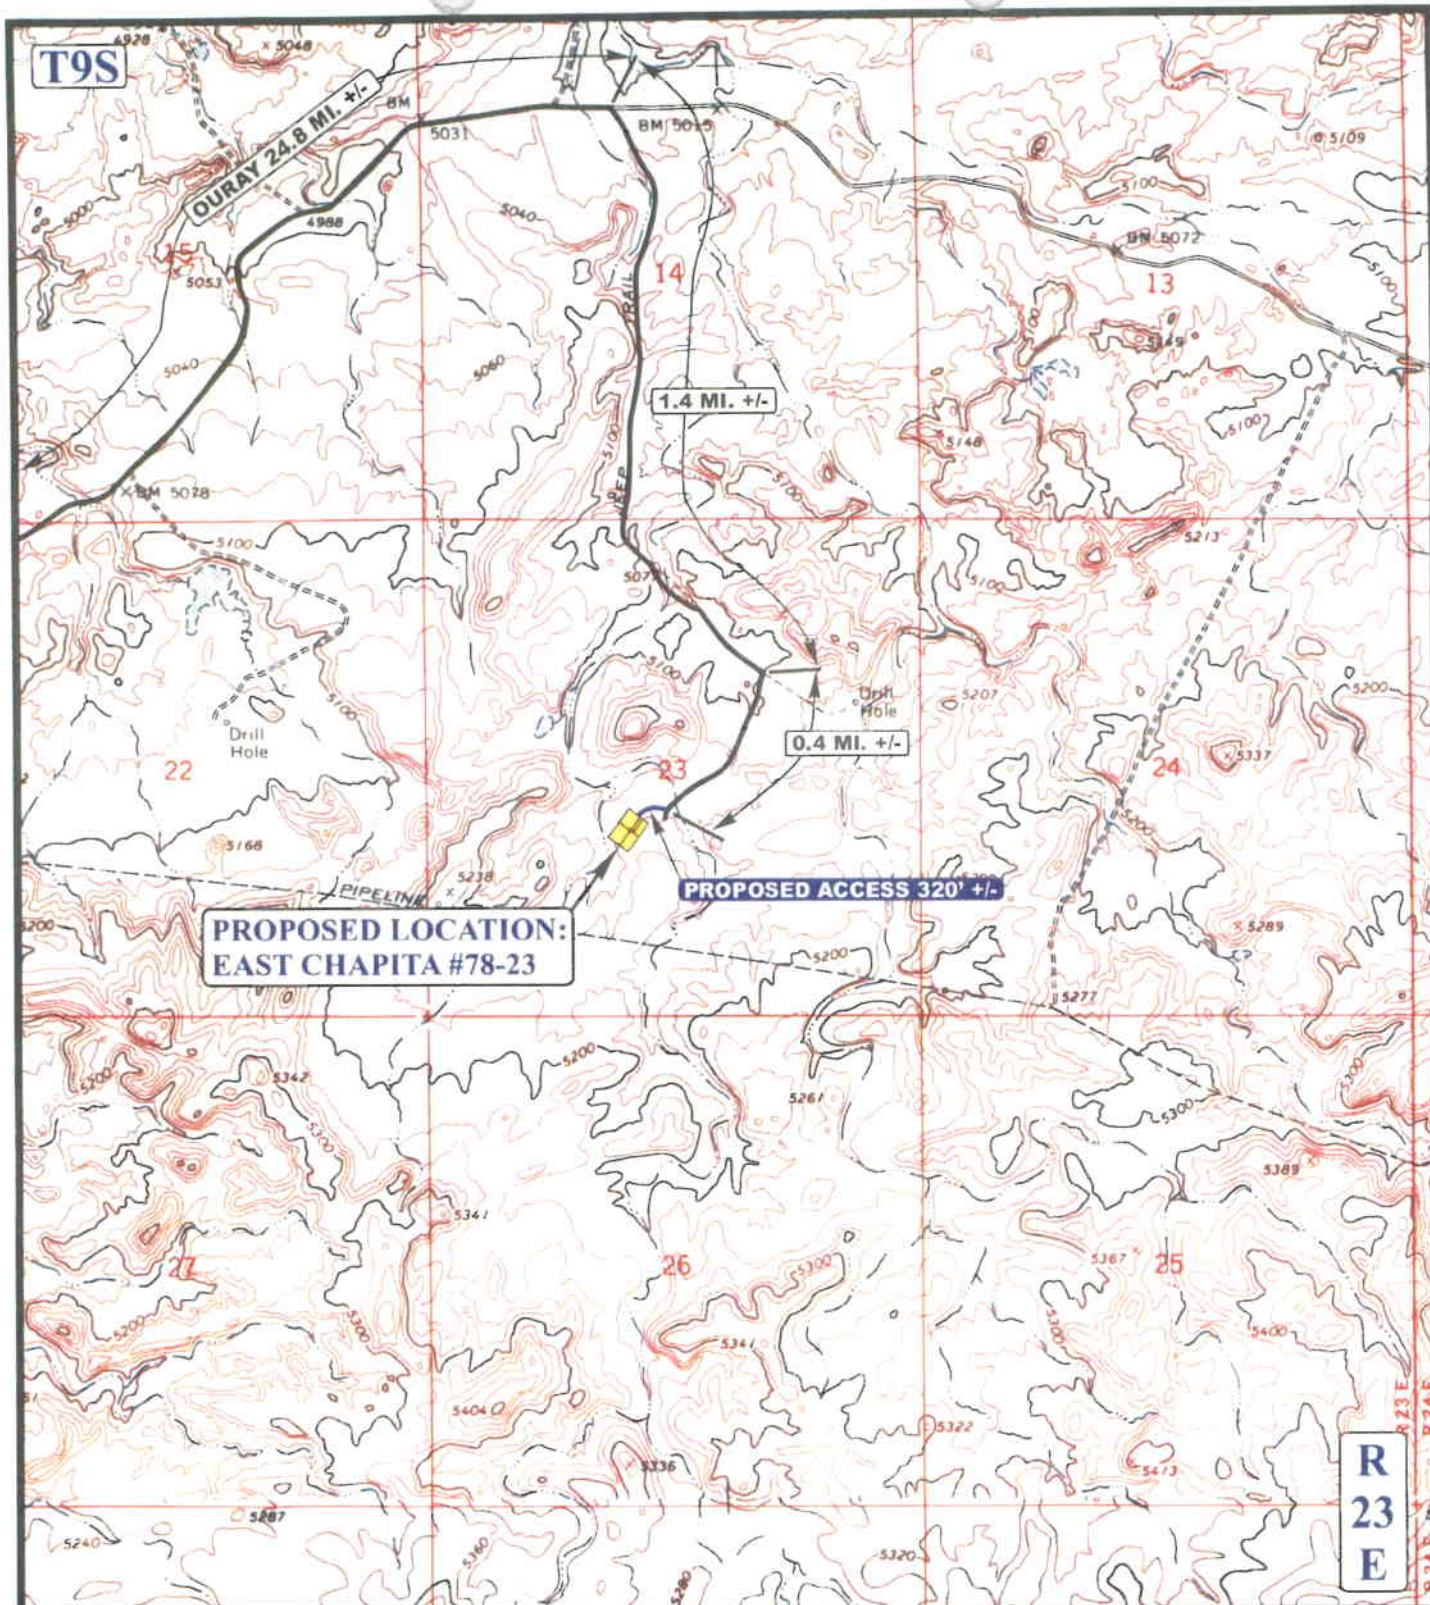

LEGEND:

— EXISTING ROAD
 - - - PROPOSED ACCESS ROAD



EOG RESOURCES INC.

EAST CHAPITA #78-23
SECTION 23, T9S, R23E, S.L.B. & M.
1970' FSL 2170' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

05 30 07
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 00-00-00



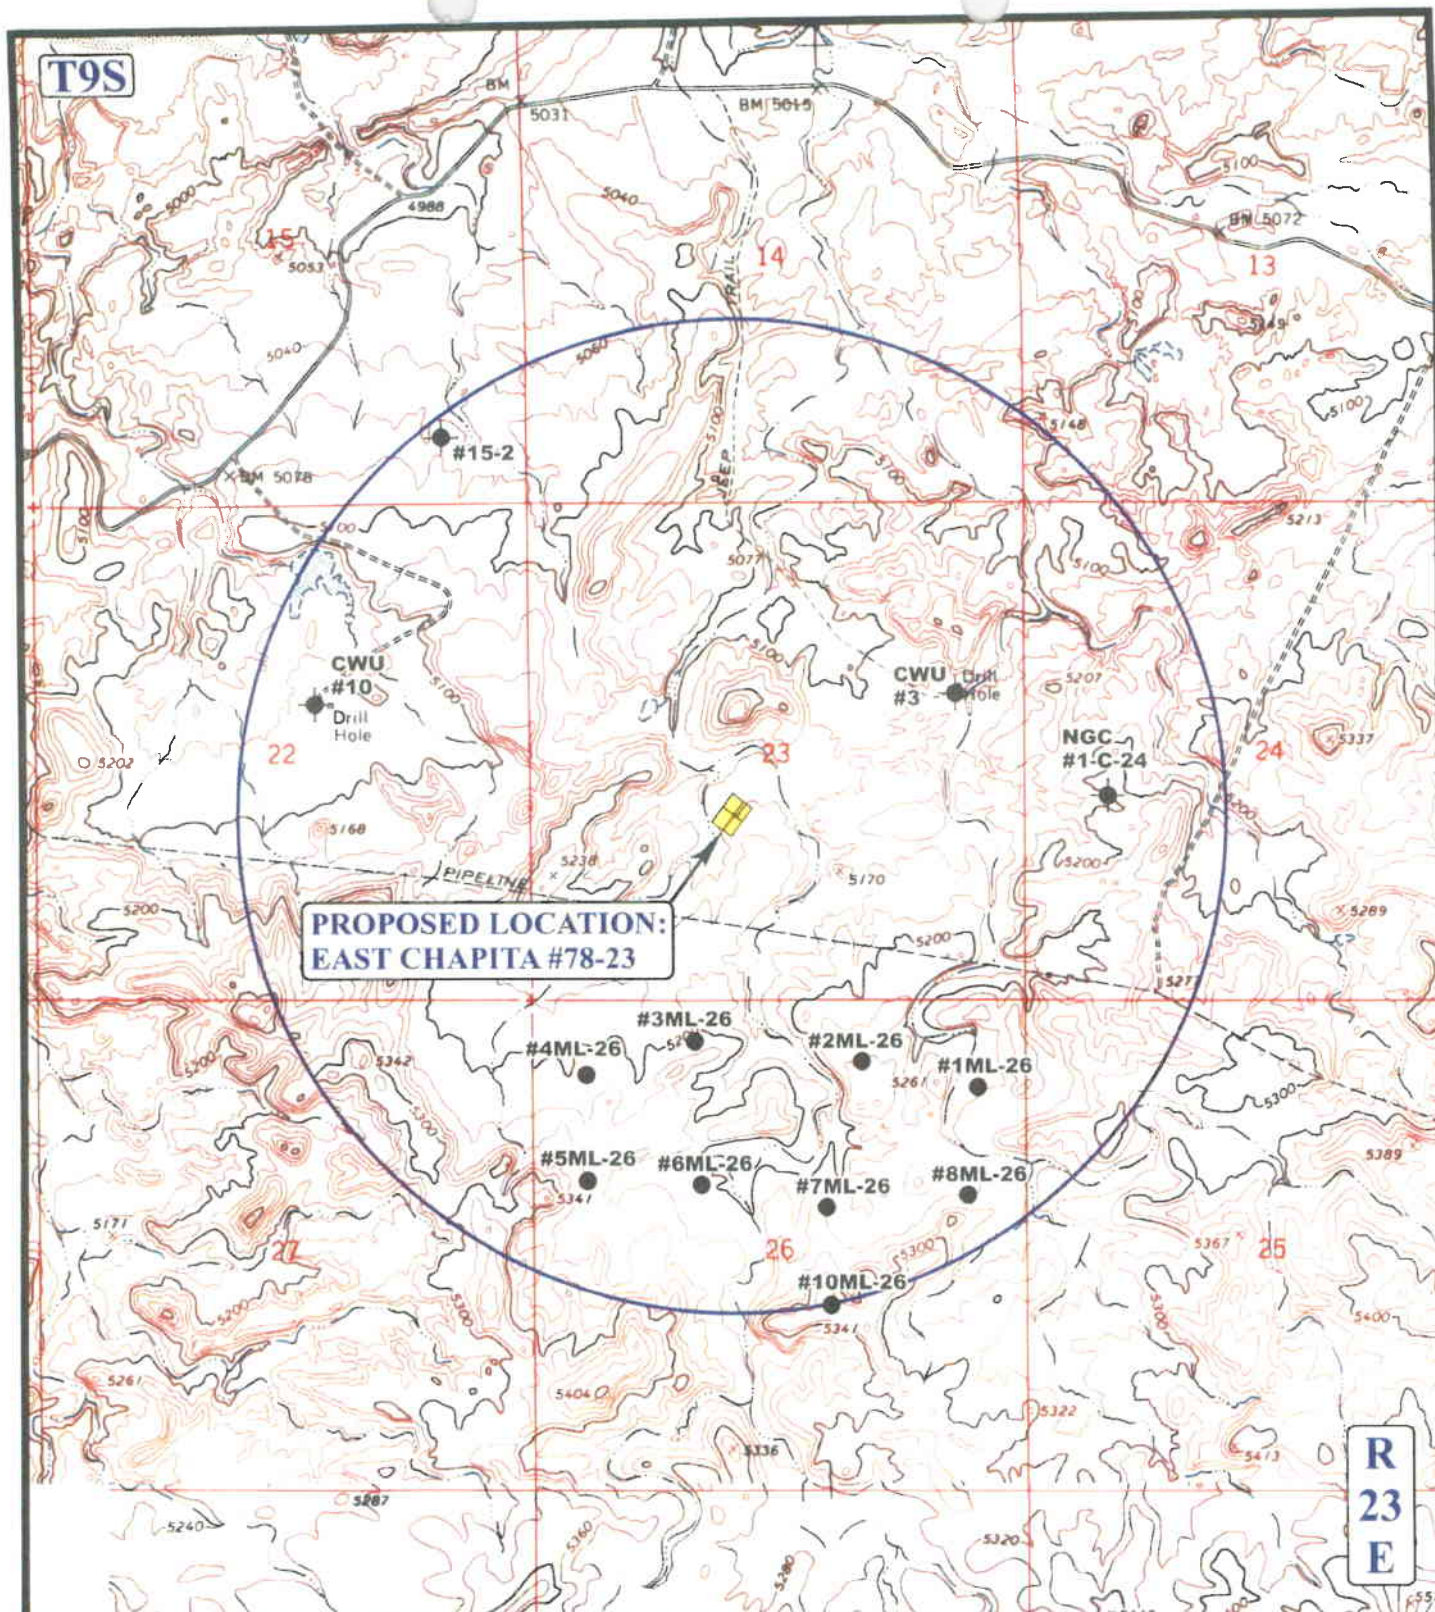

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



EOG RESOURCES INC.

EAST CHAPITA #78-23
SECTION 23, T9S, R23E, S.L.B.&M.
1970' FSL 2170' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

05 30 07
 MONTH DAY YEAR

SCALE: 1" = 2000' **DRAWN BY: B.C.** **REVISED: 00-00-00**



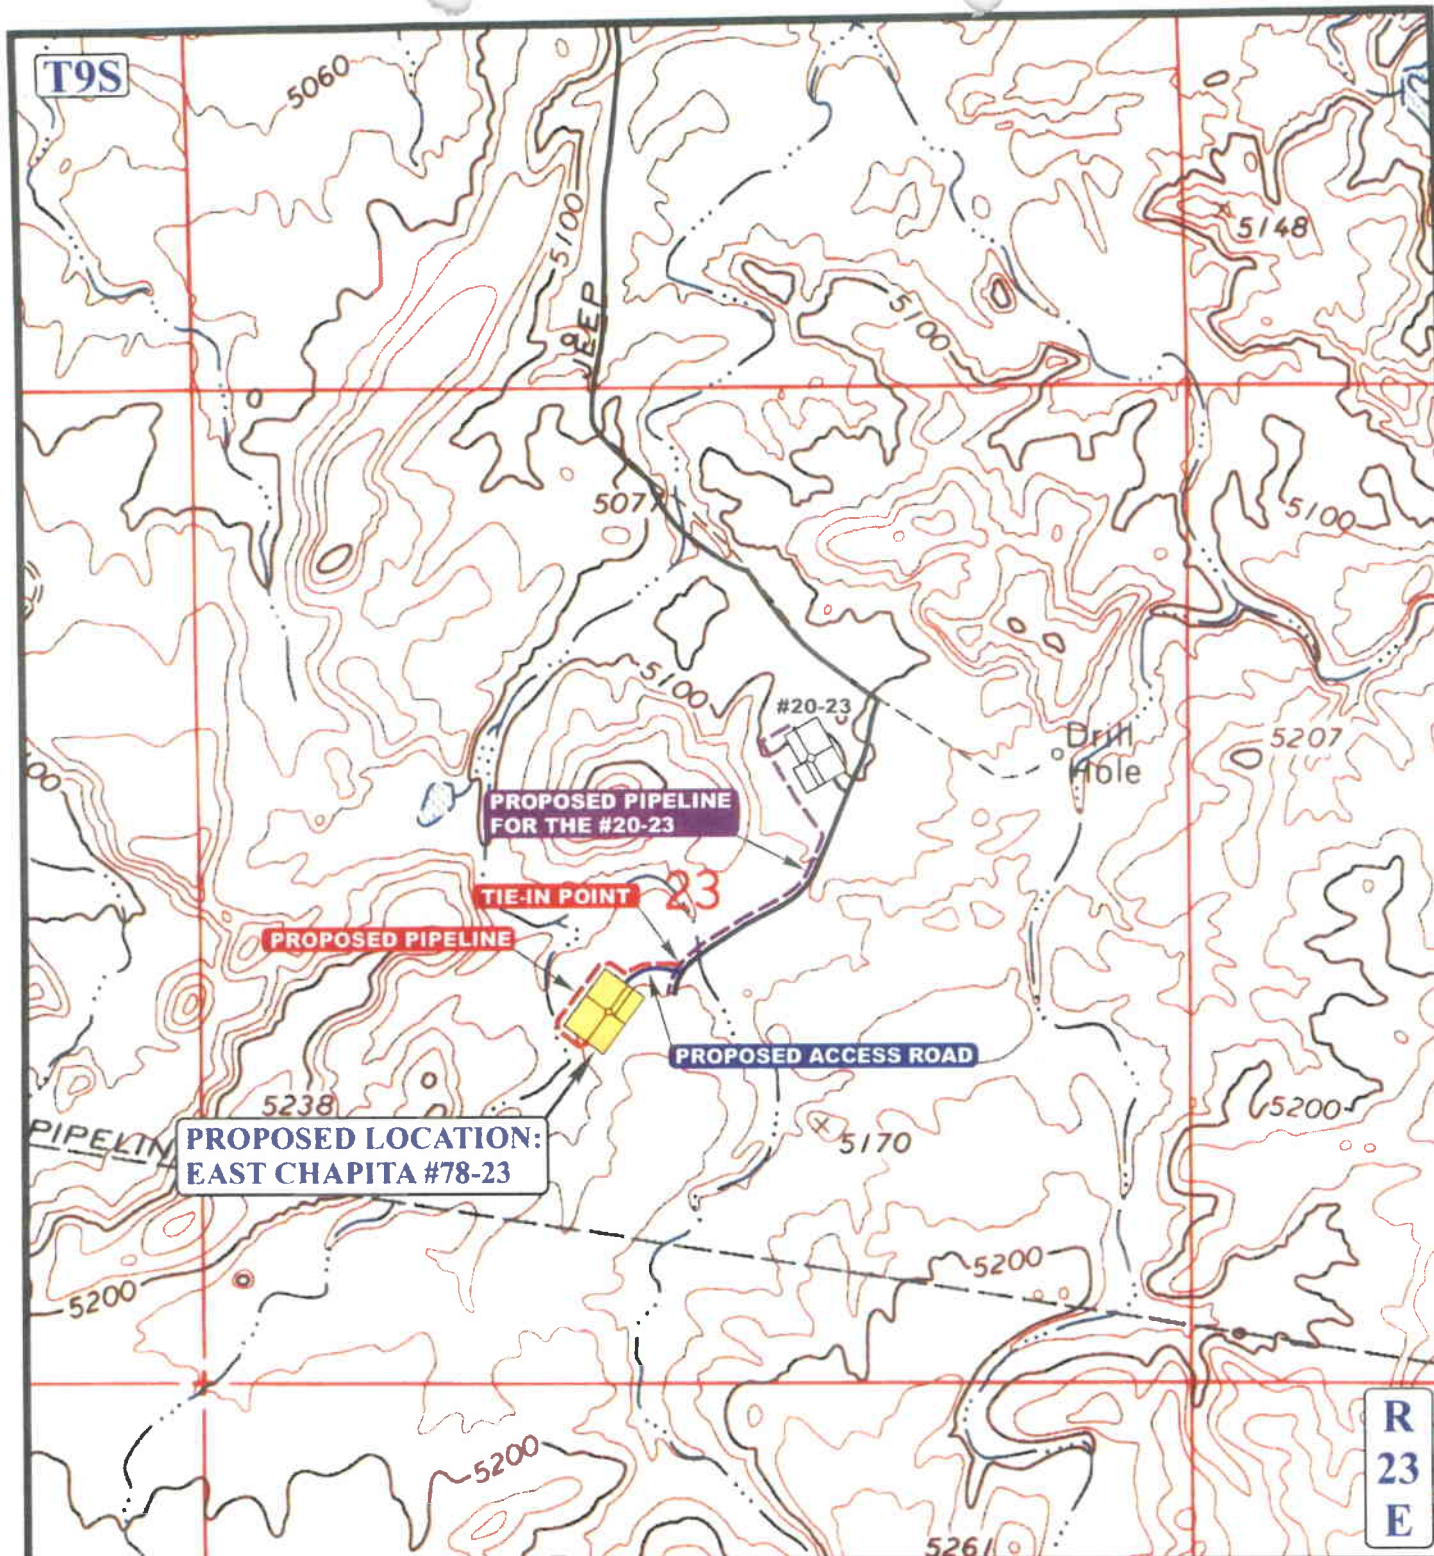

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,055' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - PROPOSED PIPELINE
- - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



EOG RESOURCES, INC.

EAST CHAPITA #78-23
SECTION 23, T9S, R23E, S.L.B.&M.
1970' FSL 2170' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

05 30 07
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 00-00-00



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/18/2007

API NO. ASSIGNED: 43-047-39309

WELL NAME: NBU 620-30E

OPERATOR: EOG RESOURCES INC (N9550)

PHONE NUMBER: 435-789-0790

CONTACT: MARY MAESTAS

PROPOSED LOCATION:

SWNW 30 100S 210E

SURFACE: 1980 FNL 0680 FWL

BOTTOM: 1980 FNL 0680 FWL

COUNTY: UINTAH

LATITUDE: 39.92049 LONGITUDE: -109.6010

UTM SURF EASTINGS: 619559 NORTHINGS: 4419659

FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering	DLD	6/25/07
Geology		
Surface		

LEASE TYPE: 3 - State

LEASE NUMBER: ML-22793

PROPOSED FORMATION: WSMVD

SURFACE OWNER: 3 - State

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[] Ind[] Sta[] Fee[]
(No. 6196017)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 49-225)
☒ RDCC Review (Y/N)
(Date: _____)
NA Fee Surf Agreement (Y/N)
NA Intent to Commingle (Y/N)

LOCATION AND SITING:


____ R649-2-3.
Unit: NATURAL BUTTES OK
____ R649-3-2. General
Siting: 460' From Qtr/Qtr & 920' Between Wells
____ R649-3-3. Exception
☒ Drilling Unit
Board Cause No: 173-14
Eff Date: 12-2-1999
Siting: 460' W u/large uncomm. tract
____ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (05-22-07)

STIPULATIONS:

1- STATEMENT OF BASIS
2- Oil Shale
3- Surface Csg Cmt Strip
4- Cmt Strip # 3 (4 1/2" production, 2100' md)

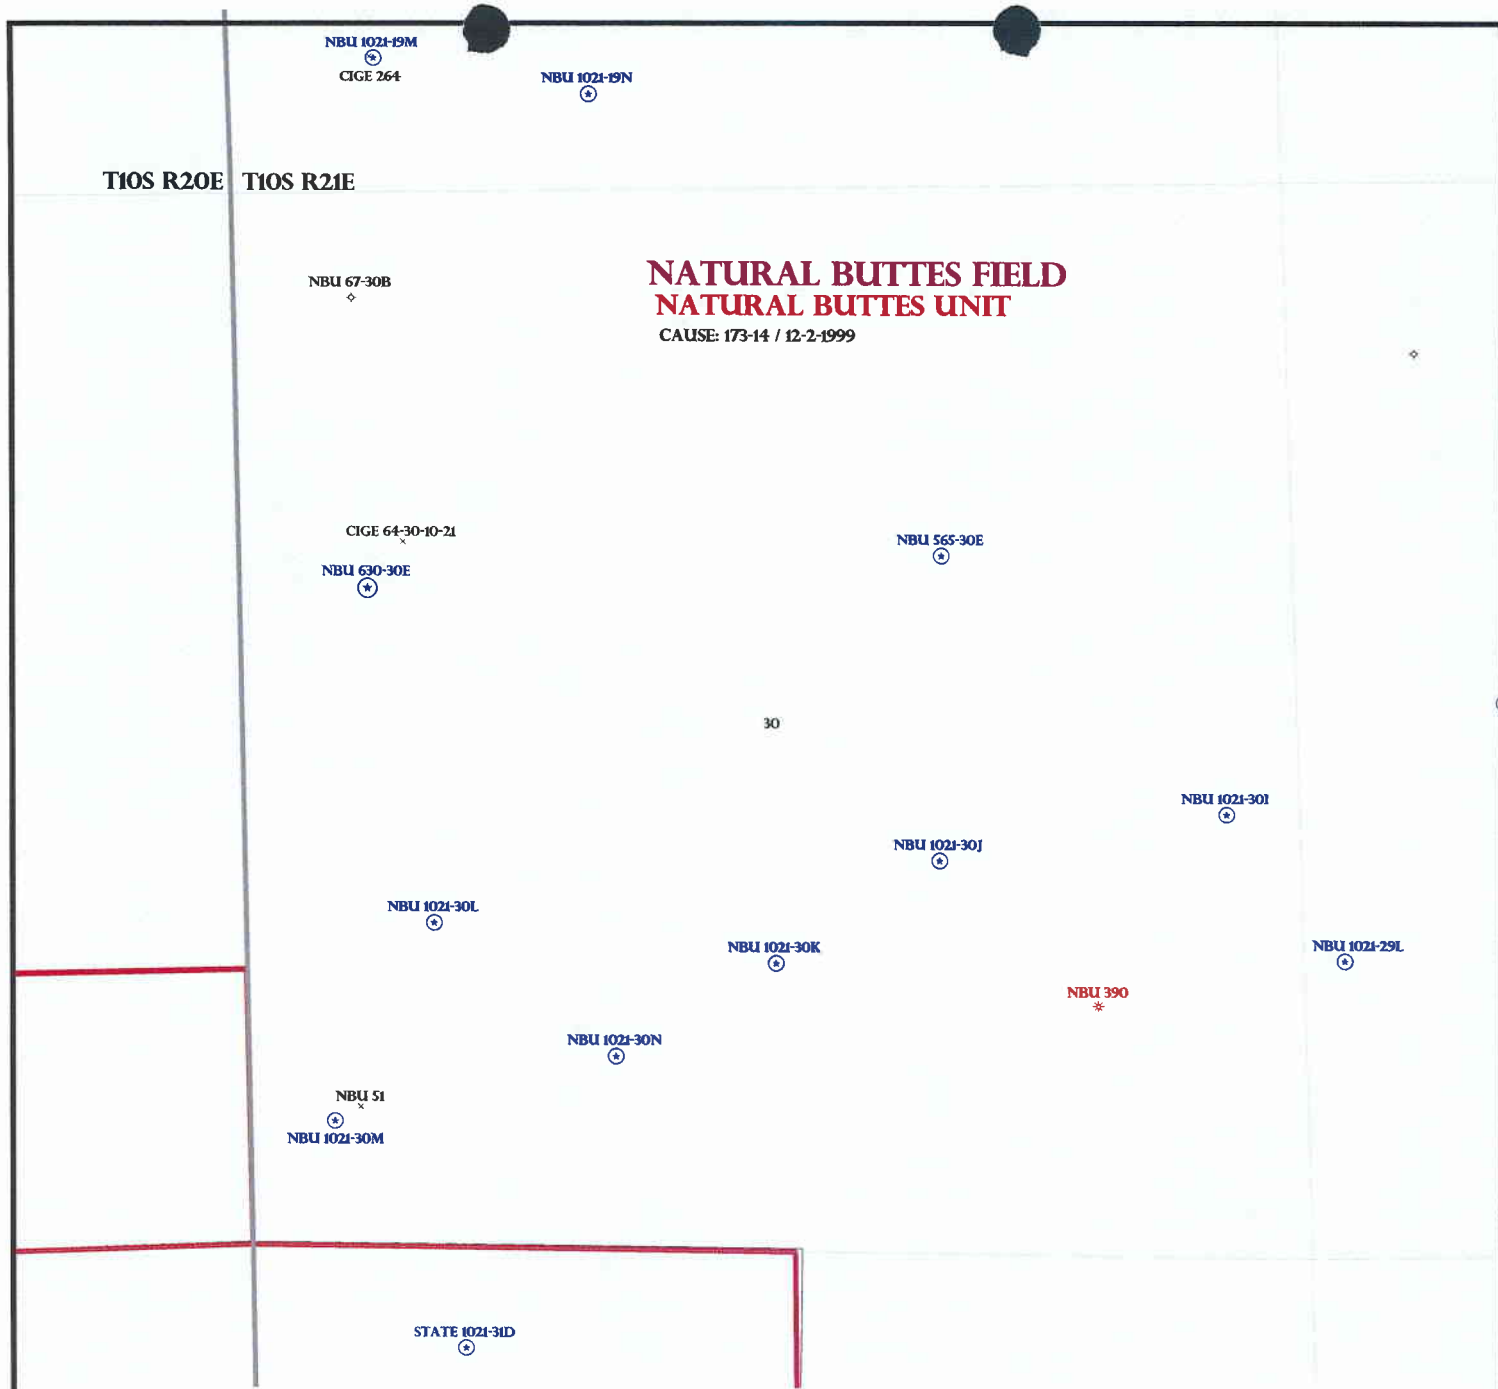

NATURAL BUTTES FIELD **NATURAL BUTTES UNIT**

CAUSE: 173-14 / 12-2-1999

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 30 T.10S R. 21E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING

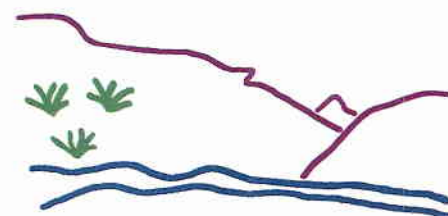

Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
 DATE: 18-MAY-2007

Application for Permit to Drill

Statement of Basis

5/29/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
432	43-047-39309-00-00		GW	S	No
Operator	EOG RESOURCES INC	Surface Owner-APD			
Well Name	NBU 620-30E	Unit	NATURAL BUTTES		
Field	NATURAL BUTTES	Type of Work			
Location	SWNW 30 10S 21E S 1980 FNL 680 FWL GPS Coord (UTM) 619559E 4419659N				

Geologic Statement of Basis

EOG proposes to set 2,300' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 4,300'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 30. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill
APD Evaluator

5/29/2007
Date / Time

Surface Statement of Basis

The general area is within the Love Area of the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 22 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 0.4 miles of the proposed site. New construction will be required from this point.

The proposed location is on the west side of a north-south gentle ridge. The ridge top will be cut with the fill extending to the west for the pad. One swale begins within the location and will be filled. No drainage concerns are present. Cottonwood Wash is approximately 1½ mile to the east.

Both the surface and minerals for this location are owned by SITLA. Jim Davis and Ed Bonner of SITLA were invited to the pre-site evaluation but neither attended. Ben Williams and Daniel Emmett of the UDWR were also invited and neither attended.

The selected location appears to be the best site for drilling and operating a well in the immediate area.

Floyd Bartlett
Onsite Evaluator

5/22/2007
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator EOG RESOURCES INC
Well Name NBU 620-30E
API Number 43-047-39309-0 **APD No** 432 **Field/Unit** NATURAL BUTTES
Location: 1/4,1/4 SWNW **Sec** 30 **Tw** 10S **Rng** 21E 1980 FNL 680 FWL
GPS Coord (UTM) 619562 4419655 **Surface Owner**

Participants

Floyd Bartlett (DOGM), Byron Tolman (Agent for EOG Resources).

Regional/Local Setting & Topography

The general area is within the Love Area of the upper Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 22 miles southeast of Ouray, Utah and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within 0.4 miles of the proposed site. New construction will be required from this point.

The proposed location is on the west side of a north-south gentle ridge. The ridge top will be cut with the fill extending to the west for the pad. One swale begins within the location and will be filled. No drainage concerns are present. Cottonwood Wash is approximately 1½ mile to the east.

Both the surface and minerals for this location are owned by SITLA.

The selected location appears to be the best site for drilling and operating a well in the immediate area.

Surface Use Plan

Current Surface Use

Recreational
Wildlife Habitat

New Road

Miles	Well Pad	Src Const Material	Surface Formation
0.4	Width 261 Length 375	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Fair vegetation cover consisting of mat saltbrush, curly mesquite, horsebrush, cheatgrass, shadscale and spring annuals.

Cows, antelope, small mammals, prairie dogs and birds.

Soil Type and Characteristics

Deep gravely sandy loam.

Erosion Issues N**Sedimentation Issues** N**Site Stability Issues** N**Drainage Diversion Required** N**Berm Required?** N**Erosion Sedimentation Control Required?** N**Paleo Survey Run?****Paleo Potential Observed?** N**Cultural Survey Run?****Cultural Resources?****Reserve Pit****Site-Specific Factors****Site Ranking****Distance to Groundwater (feet)** >200

0

Distance to Surface Water (feet) >1000

0

Dist. Nearest Municipal Well (ft) >5280

0

Distance to Other Wells (feet) 300 to 1320

10

Native Soil Type Mod permeability

10

Fluid Type Fresh Water

5

Drill Cuttings Normal Rock

0

Annual Precipitation (inches) <10

0

Affected Populations <10

0

Presence Nearby Utility Conduits Not Present

0

Final Score

25

1

Sensitivity Level**Characteristics / Requirements**

The reserve pit is planned in an area of cut in the northeast corner of the location. A liner with an appropriate thickness of felt sub-liner is required. EOG commonly uses a 16 mil liner.

Closed Loop Mud Required? N**Liner Required?** Y**Liner Thickness** 16**Pit Underlayment Required?** Y**Other Observations / Comments**

Floyd Bartlett

5/22/2007

Evaluator**Date / Time**

Casing Schematic

Surface

BHP $0.052(7219)10.5 = 3942 \text{ psi}$
anticipate 3940 psi

Gas $.12(7219) = 866$
 $3942 - 866 = 3076 \text{ psi, MAST}$

BOPE SH ✓

Burst 3520
70% 2464 psi

Max P @ surf. shoe

$.22(4919) = 1082$
 $3942 - 1082 = 2860 \text{ psi}$

test to 2464 psi ✓

Stop cmts ✓

✓ Adequate DRD 6/25/07

9-5/8"
MW 8.4
Frac 19.3

4-1/2"
MW 10.5

18 1/2

Uenta

TOC @ 801. to surf w/ 16% w/o
Propose TOC to Surface ✓
*stc P
1086' Green River
*oil shale stc P ✓

2197' TOC w/ 2% w/o
Surface
2300. MD

TOC @ 3355.

Propose TOC to ±2100' MD ✓
Gage + 458
*stc P

4300' ± BMSW
4341' Wasatch

4978' Chapita Wells

5674' Buck Canyon

6277' North Horn

Production
7219. MD

Well name:

2007-06 EOG NBU 620-30EOperator: **EOG Resources Inc.**String type: **Surface**

Project ID:

43-047-39309Location: **Uintah County****Design parameters:****Collapse**Mud weight: 8.400 ppg
Design is based on evacuated pipe.**Minimum design factors:****Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 107 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 290 ft

Cement top: 801 ft

BurstMax anticipated surface
pressure: 2,024 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,300 psi

No backup mud specified.

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)Tension is based on buoyed weight.
Neutral point: 2,014 ft**Non-directional string.****Re subsequent strings:**Next setting depth: 7,219 ft
Next mud weight: 10.500 ppg
Next setting BHP: 3,938 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,300 ft
Injection pressure: 2,300 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2300	9.625	36.00	J-55	ST&C	2300	2300	8.796	998.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	1004	2020	2.013	2300	3520	1.53	73	394	5.43 J

Prepared Helen Sadik-Macdonald
by: Div of Oil, Gas & MineralsPhone: 801-538-5357
FAX: 801-359-3940Date: June 7, 2007
Salt Lake City, Utah**Remarks:**Collapse is based on a vertical depth of 2300 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.
Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:

2007-06 EOG NBU 620-30EOperator: **EOG Resources Inc.**String type: **Production**

Project ID:

43-047-39309Location: **Uintah County****Design parameters:****Collapse**Mud weight: 10.500 ppg
Design is based on evacuated pipe.**Minimum design factors:****Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 176 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: 3,355 ft

BurstMax anticipated surface
pressure: 2,349 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 3,938 psi

No backup mud specified.

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)**Non-directional string.**

Tension is based on buoyed weight.

Neutral point: 6,086 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	7219	4.5	11.60	N-80	LT&C	7219	7219	3.875	630
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	3938	6350	1.613	3938	7780	1.98	71	223	3.16 J

Prepared Helen Sadik-Macdonald
by: Div of Oil, Gas & MineralsPhone: 801-538-5357
FAX: 801-359-3940Date: June 7, 2007
Salt Lake City, Utah**Remarks:**Collapse is based on a vertical depth of 7219 ft, a mud weight of 10.5 ppg. The casing is considered to be evacuated for collapse purposes.
Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

From: Ed Bonner
To: Mason, Diana
Date: 8/30/2007 11:06 AM
Subject: Well Clearance

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

Bill Barrett Corporation

Prickly Pear Unit State 10-16D-12-15 (API 43 007 31322)
Prickly Pear Unit State 16-16D-12-15 (API 43 007 31323)
Prickly Pear Unit State 14-16D-12-15 (API 43 007 31324)

ConocoPhillips Company

Utah 29-575D (API 43 015 30731)
Utah 32-559 (API 43 015 30732)
Utah 33-602D (API 43 015 30733)

Enduring Resources, LLC

Cedar Corral 11-24-44-32 (API 43 047 39468)

EOG Resources, Inc

Natural Buttes Unit 602-36E (API 43 047 39308)
Natural Buttes Unit 620-30E (API 43 047 39309)

If you have any questions regarding this matter please give me a call.



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

August 30, 2007

EOG Resources Inc.
1060 East Highway 40
Vernal, UT 84078

Re: Natural Buttes Unit 620-30E Well, 1980' FNL, 680' FWL, SW NW, Sec. 30, T. 10 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39309.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management Vernal Office
SITLA

Operator: EOG Resources Inc.
Well Name & Number Natural Buttes Unit 620-30E
API Number: 43-047-39309
Lease: ML-22793

Location: SW NW Sec. 30 T. 10 South R. 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following action during drilling of this well:

- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- 24 hours prior to testing blowout prevention equipment – contact Dan Jarvis
- 24 hours prior to spudding the well – contact Carol Daniels
- Within 24 hours of any emergency changes made to the approved drilling program – contact Dustin Doucet
- Prior to commencing operations to plug and abandon the well – contact Dan Jarvis

The operator is required to get approval from the Division of Oil, Gas and Mining before performing any of the following actions during the drilling of this well:

- Plugging and abandonment or significant plug back of this well – contact Dustin Doucet
- Any changes to the approved drilling plan – contact Dustin Doucet

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at: (801) 538-5338 office (801) 942-0873 home
- Carol Daniels at: (801) 538-5284 office
- Dustin Doucet at: (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.
7. Surface casing shall be cemented to the surface.
8. Cement volume for the 4 1/2" production string shall be determined from actual hole diameter in order to place cement from the pipe setting depth back to 2100' MD as indicated in the submitted drilling plan.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22793
2. NAME OF OPERATOR: EOG Resources, Inc.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: _____
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY Vernal STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: Natural Buttes Unit
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980' FNL & 680' FWL 39.920417 LAT 109.601731 LON QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNW 30 10S 21E S		8. WELL NAME and NUMBER: Natural Buttes Unit 620-30E
PHONE NUMBER: (435) 781-9111		9. API NUMBER: 43-047-39309
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Natural Buttes/Mesaverde
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: APD Extension
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 08-04-08
By: [Signature]

COPY SENT TO OPERATOR

Date: 8-5-2008
Initials: KS

NAME (PLEASE PRINT) Kaylene R. Gardner	TITLE Lead Regulatory Assistant
SIGNATURE <u>[Signature]</u>	DATE 7/30/2008

(This space for State use only)

RECEIVED

AUG - 1 2008

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-39309
Well Name: Natural Buttes Unit 620-30E
Location: 1980 FNL - 680 FWL (SWNW), Section 30, T10S, R21E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 8/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

7/30/2008

Date

Title: Lead Regulatory Assistant

Representing: EOG Resources, Inc.

RECEIVED

AUG - 1 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☒ OTHER _____

2. NAME OF OPERATOR:
EOG Resources, Inc.

3. ADDRESS OF OPERATOR: 1060 E. HWY 40 Vernal UT 84078 PHONE NUMBER: (435) 789-0790

4. LOCATION OF WELL
FOOTAGES AT SURFACE: Multiple (See Attached)

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

43 041 39 309
NBU 620-30E
10S 21E 30

5. LEASE DESIGNATION AND SERIAL NUMBER:
Multiple (See Attached)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
Natural Buttes Unit

8. WELL NAME and NUMBER:
Multiple (See Attached)

9. API NUMBER:
Multiple (See Attached)

10. FIELD AND POOL, OR WILDCAT:
Natural Buttes

COUNTY: Uintah, UT

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Air Drilling Variance Request
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests authorization for air drilling operations, see attached.

COPY SENT TO OPERATOR

Date: 10.14.2008

Initials: KS

NAME (PLEASE PRINT) Mickenzie Thacker

TITLE Operations Clerk

SIGNATURE Mickenzie Thacker

DATE 9/17/2008

(This space for State use only)

APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING

DATE: 10/17/08

BY: [Signature]

(See Instructions on Reverse Side)

RECEIVED

SEP 22 2008

DIV. OF OIL, GAS & MINING

API #	Lease #	Well Name	Footages	¼-¼ Legal Description
43-047-39309	ML-22793	NBU 620-30E	1980' FNL 680' FWL	SWNW Sec. 30 T10S R21E
43-047-50019	UTU-08512-ST	NBU 639-13E	859' FNL 1902' FEL	NWNE Sec. 13 T10S R22E
43-047-50017	ML-22790	NBU 662-24E	809' FSL 807' FWL	SWSW Sec. 24 T10S R20E
43-047-39867	ML-22790	NBU 664-24E	1810' FSL 1781' FEL	NWSE Sec. 24 T10S R20E
43-047-50018	ML-22790	NBU 665-24E	1950' FSL 660' FEL	NESE Sec. 24 T10S R20E
43-047-50012	ML-22790	NBU 667-24E	660' FSL 660' FEL	SESE Sec. 24 T10S R20E
43-047-50030	UO-1207-ST	NBU 669-29E	1927' FNL 1980' FEL	SWNE Sec. 29 T9S R22E
43-047-50027	UO-1207-ST	NBU 691-29E	680' FNL 797' FEL	NENE Sec. 29 T9S R22E

Air Drilling Operations:


1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 1

Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

1. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
2. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
3. EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
4. EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
5. EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-22793
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: 1060 East Highway 40, Vernal, UT, 84078		8. WELL NAME and NUMBER: NBU 620-30E
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1980 FNL 0680 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNW Section: 30 Township: 10.0S Range: 21.0E Meridian: S		9. API NUMBER: 43047393090000
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/4/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.		
Approved by the Utah Division of Oil, Gas and Mining Date: August 06, 2009 By: 		
NAME (PLEASE PRINT) Mckenzie Thacker	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A	DATE 8/4/2009	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047393090000

API: 43047393090000

Well Name: NBU 620-30E

Location: 1980 FNL 0680 FWL QTR SWNW SEC 30 TWNP 100S RNG 210E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mickenzie Thacker

Date: 8/4/2009

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

Date: August 06, 2009

By:

RECEIVED August 04, 2009



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

September 7, 2010

EOG Resources Inc.
1060 East Highway 40
Vernal, Utah 84078

Re: APD Rescinded – NBU 620-30E, Sec. 30, T. 10S, R. 21E
Uintah County, Utah API No. 43-047-39309


Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on August 30, 2007. On August 4, 2008 and August 6, 2009, the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective September 7, 2010.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner

